

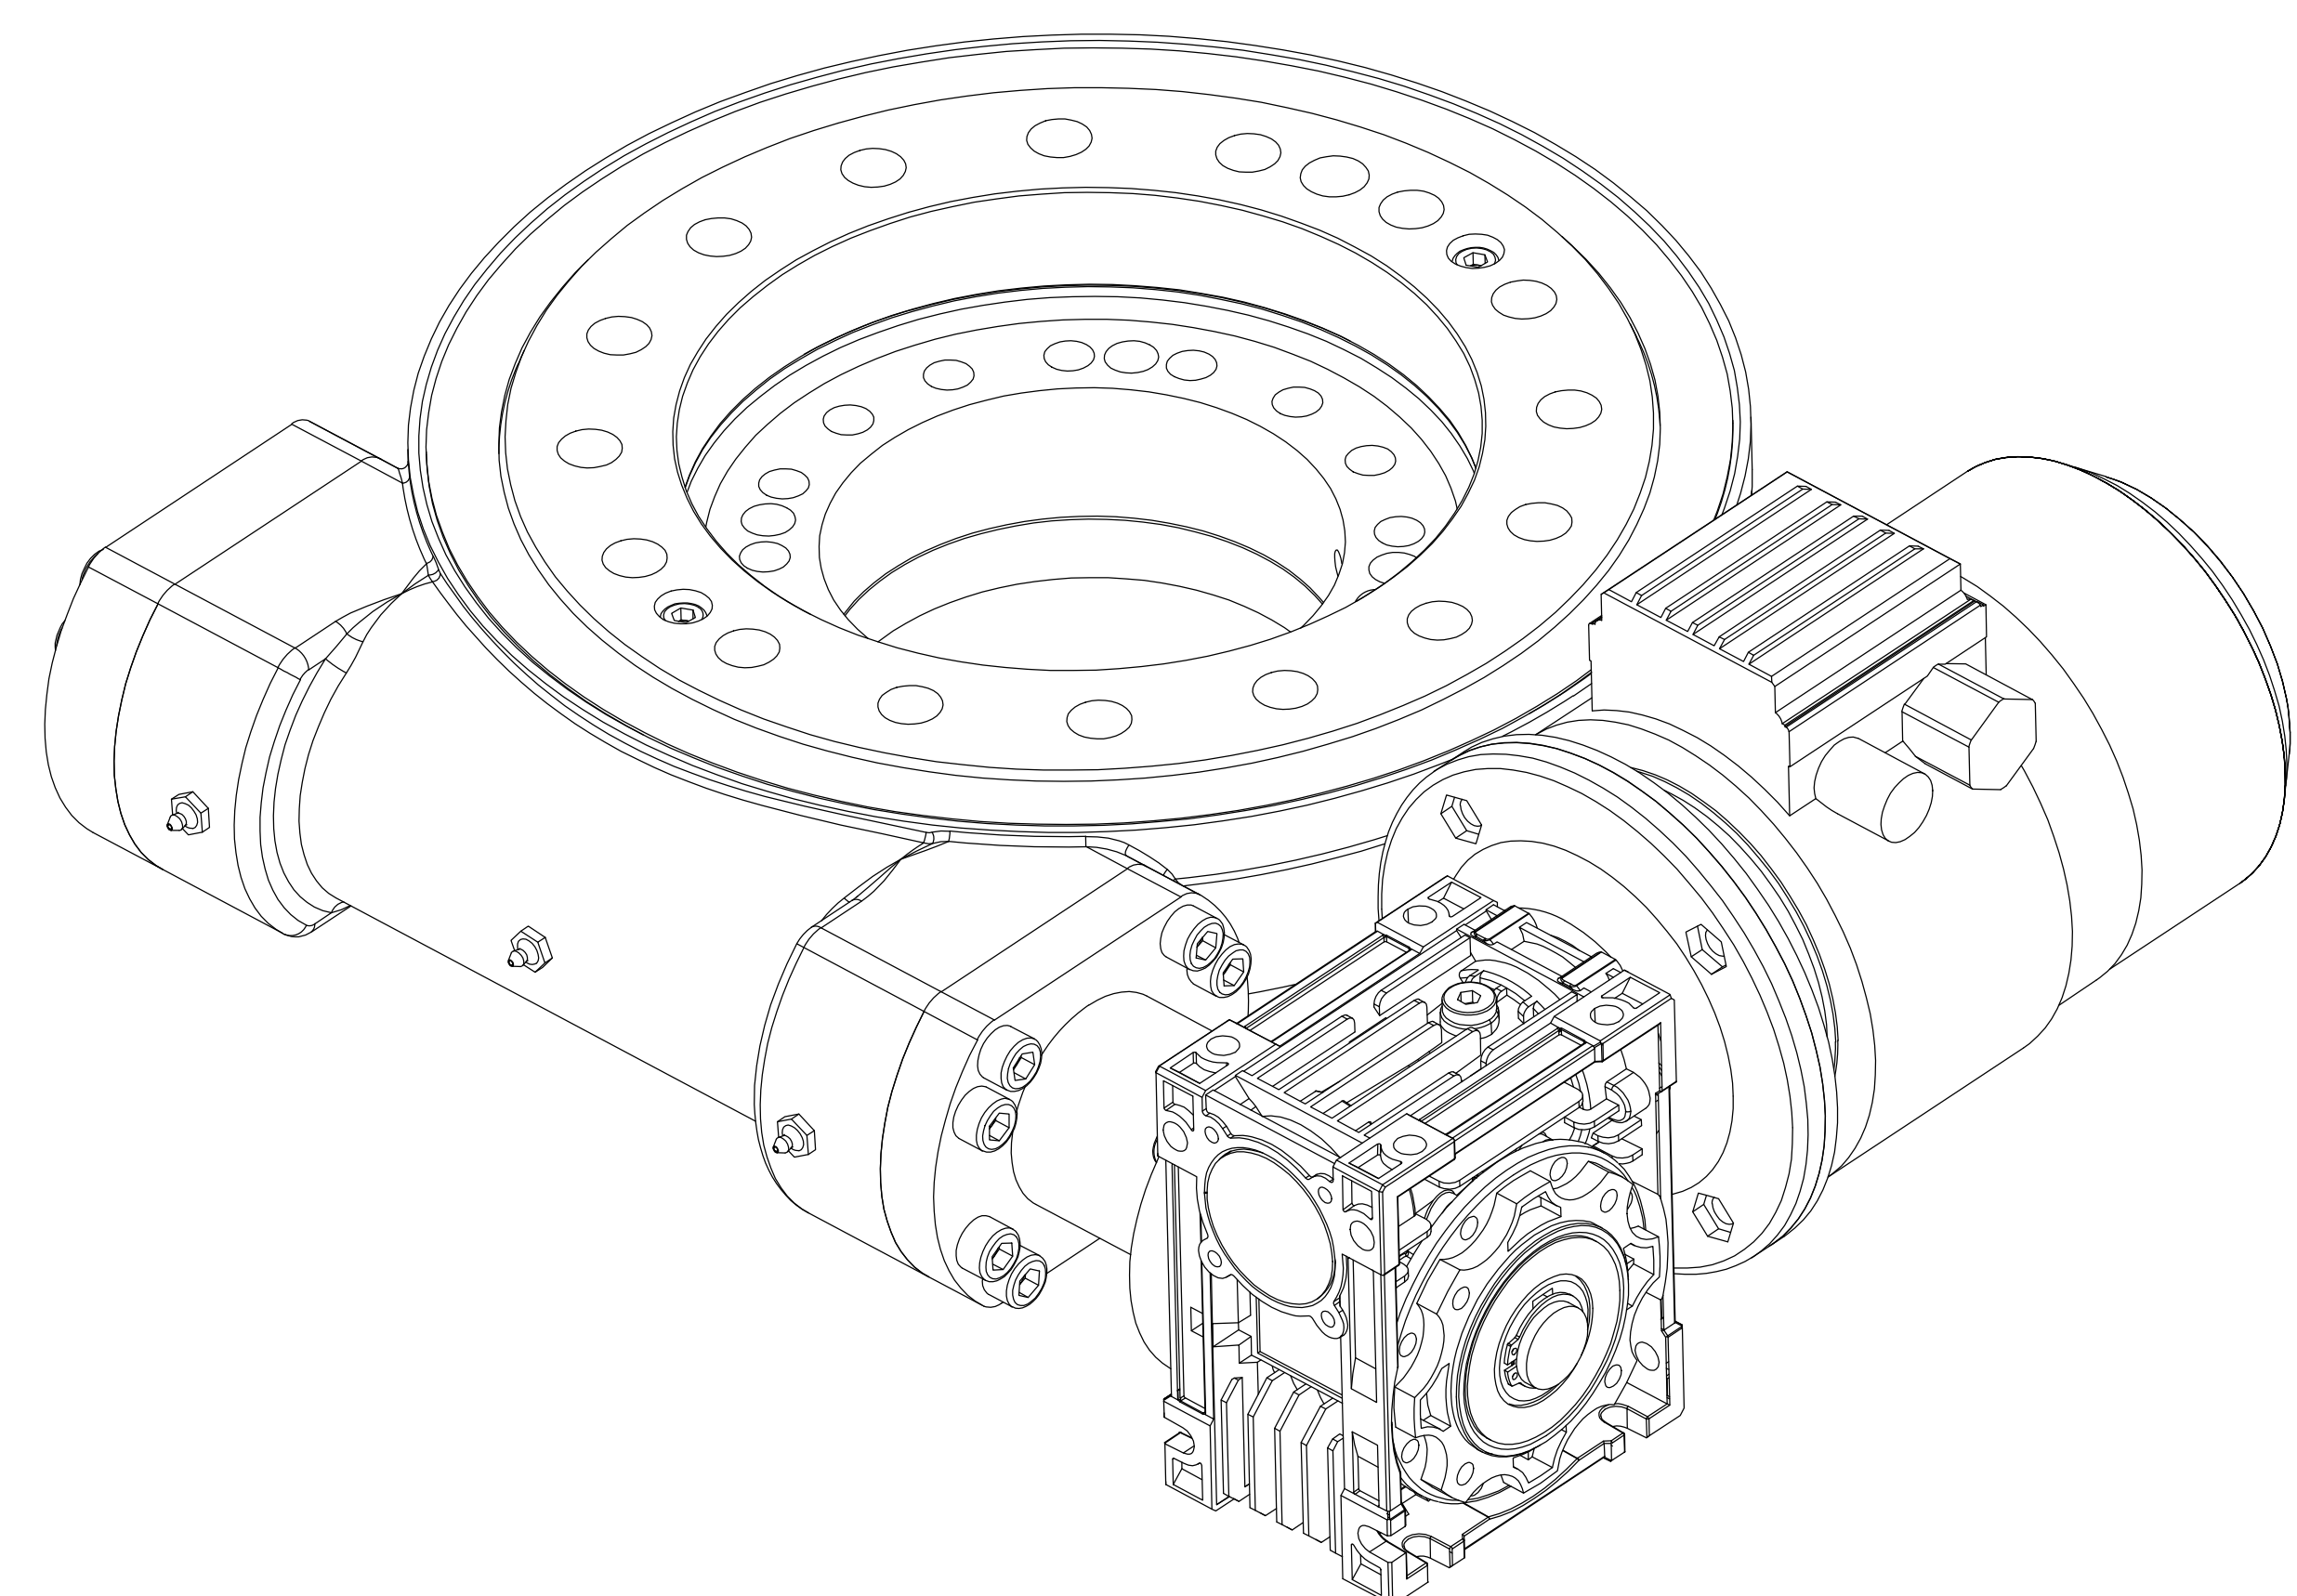
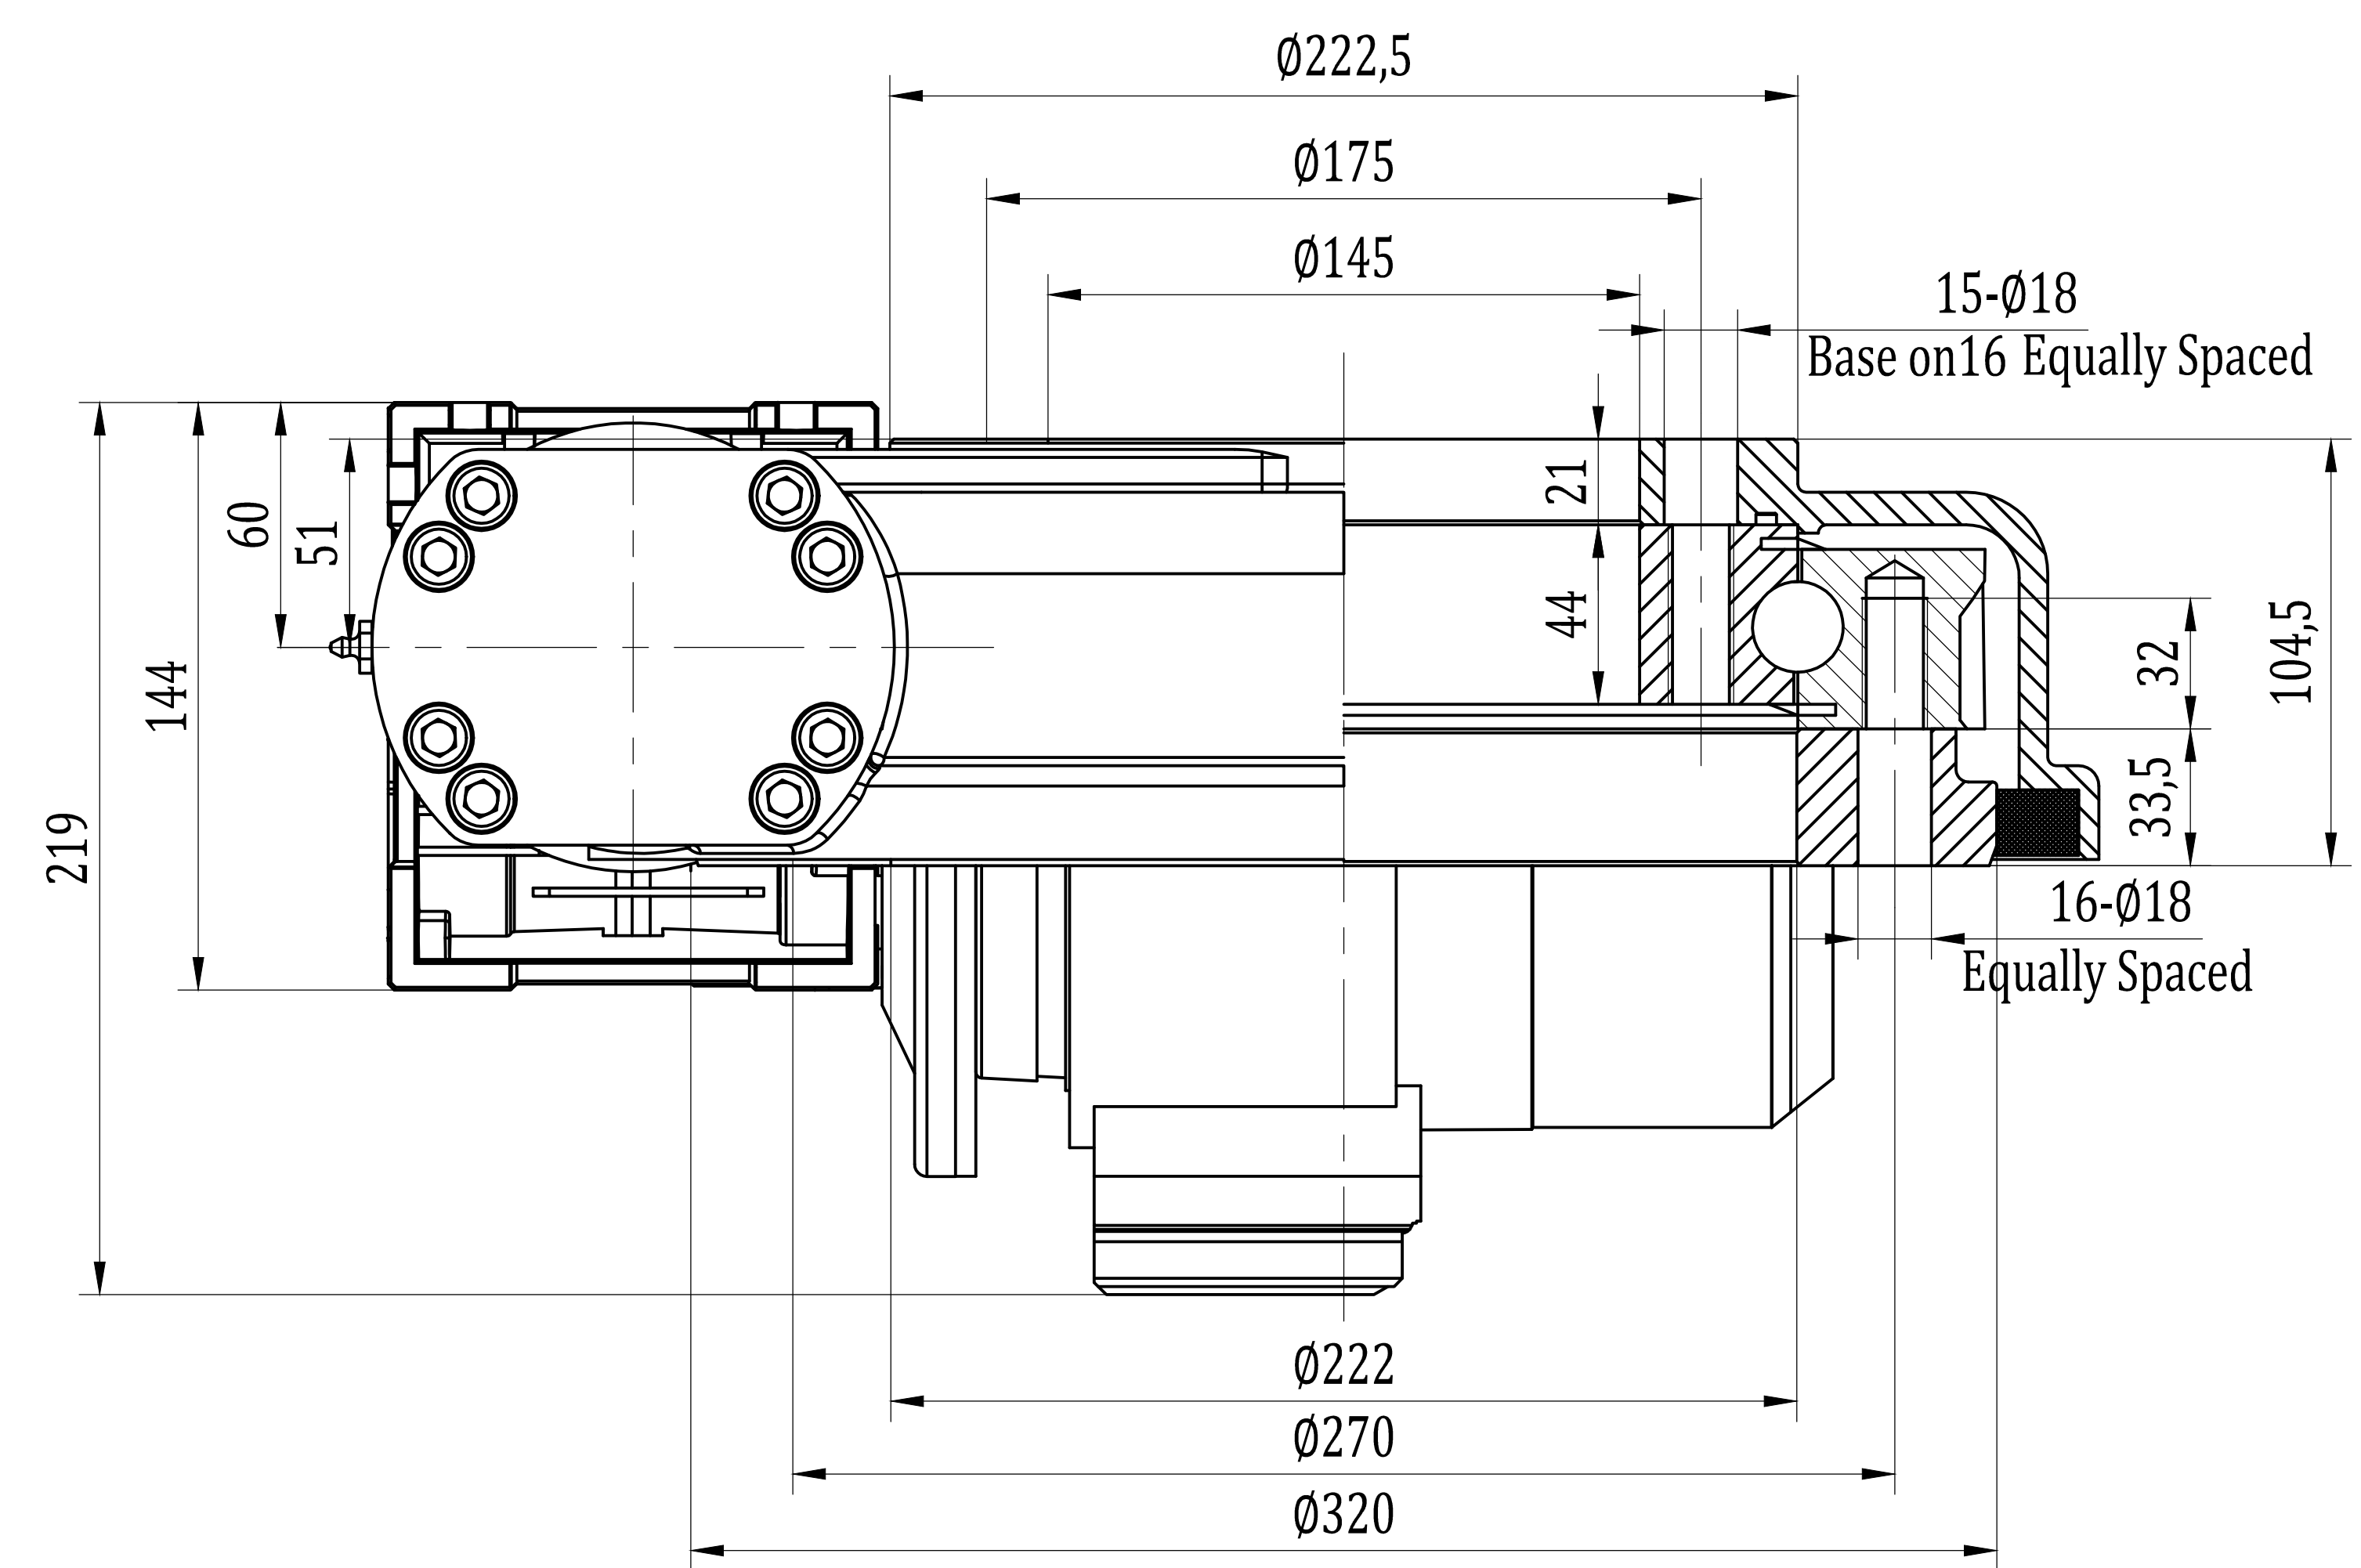
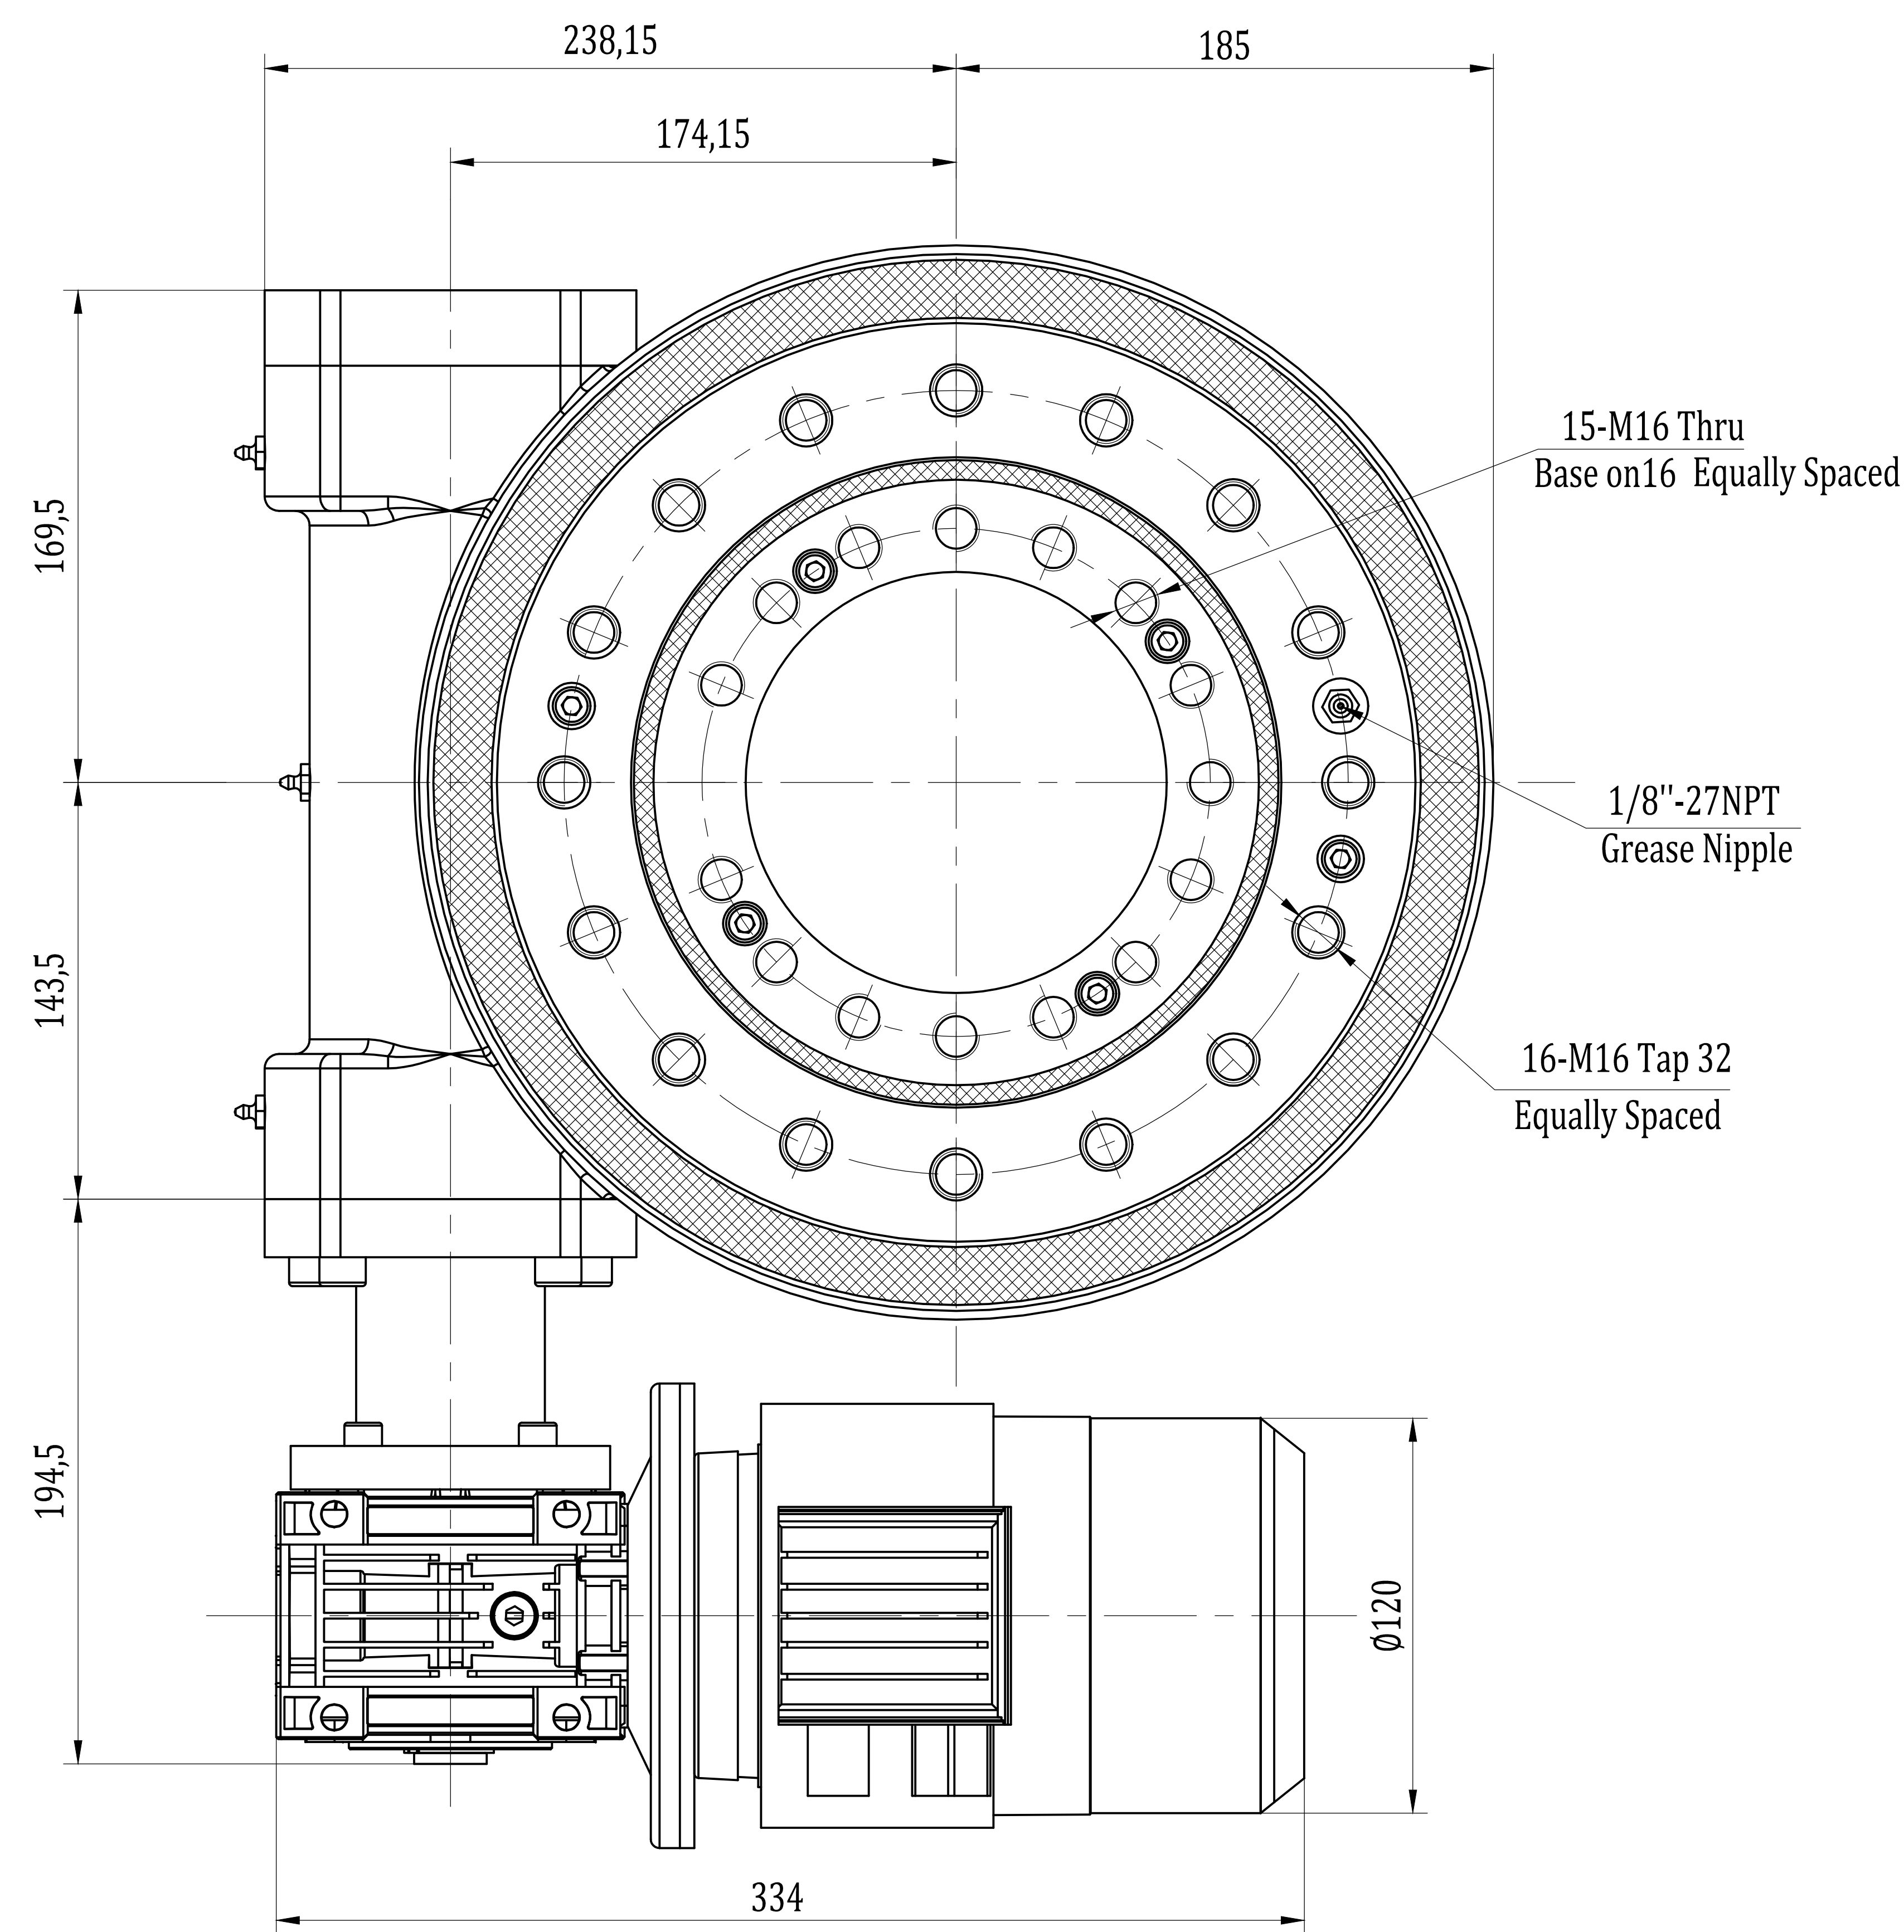


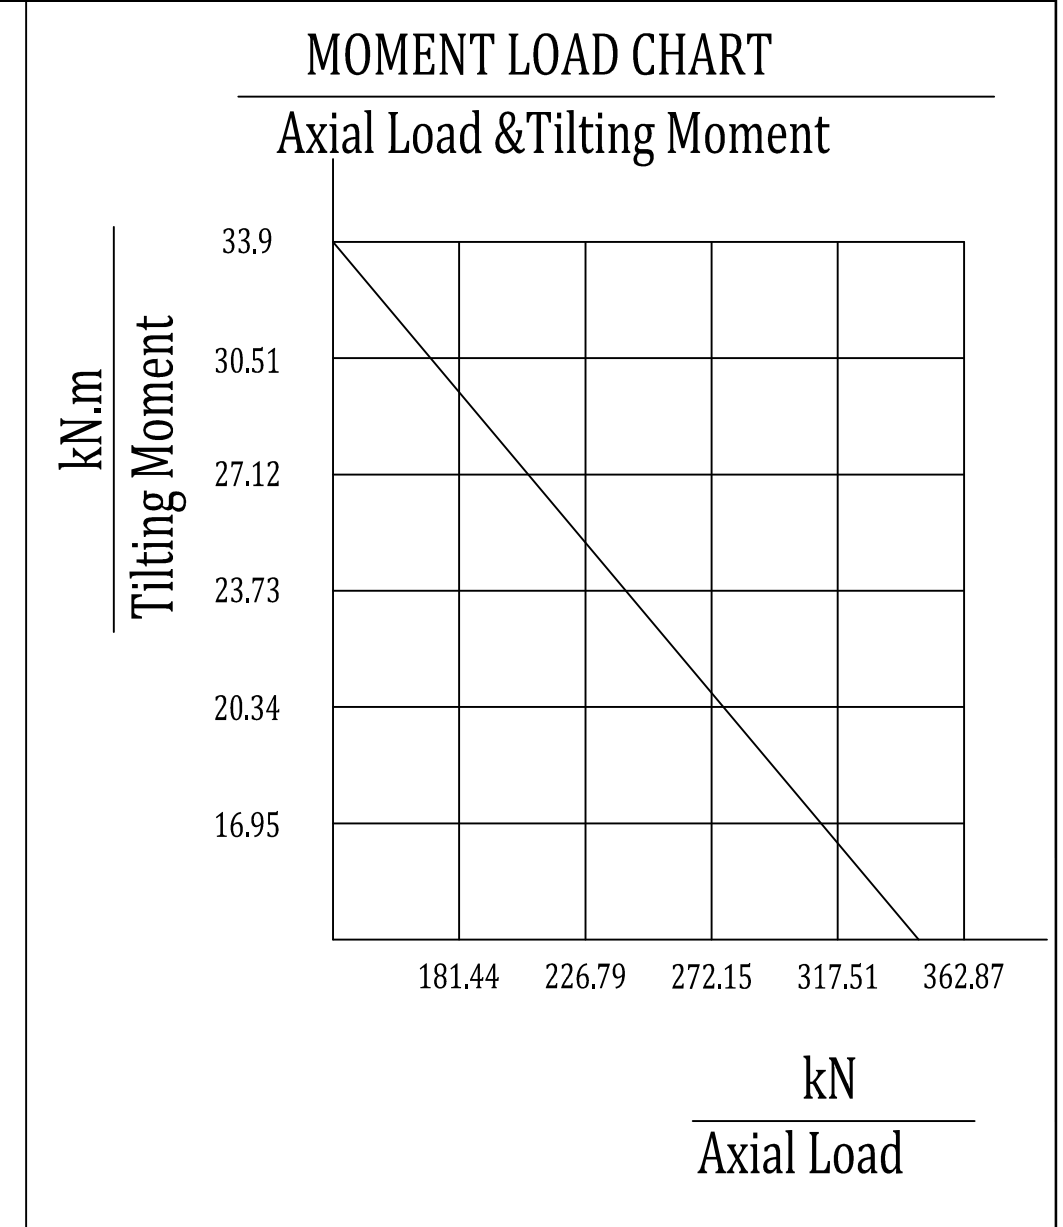

Slewing Drive Performance Parameters		
Rated Output Speed（max）	0.46 rpm	
Output Torque(max)	870N.m	642 lbf.ft
Tilting Moment	33.9 kN.m	25x10 ³ lbf.ft
Holding Torque	38.7 kN.m	29x10 ³ lbf.ft
Static Axial Load Rating	338 kN	76x10 ³ lbf
Static Radial Load Rating	135 kN	30x10 ³ lbf
Gear Ratio	61:1	
Precision	≤0.17°	
230V AC Motor Performance Data(230/280/35)		
Rated Output Torque	35.67 N.m	
Rated Output Speed	28 rpm	
Rated voltage	230V	
Rated power	0.18KW	
Rated frequency	50HZ	
IP Class	IP 55	
Temperature	-30°C≤0≤60°C	
Humidity	90%	

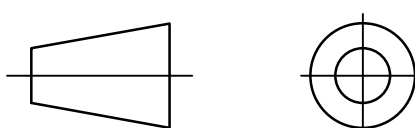

REV	DATE	REVISER	REVISER				
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.				
CHECKED BY	2019/8/1	Rui Wang					
APPROVED BY	2019/8/1	Shane Zhang					
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive		
				1 : 3			
SYMBOLE ISO			SIZE	A3	SC9-61-RC-230V-A071		REV
			SHEET	1 / 1			A